
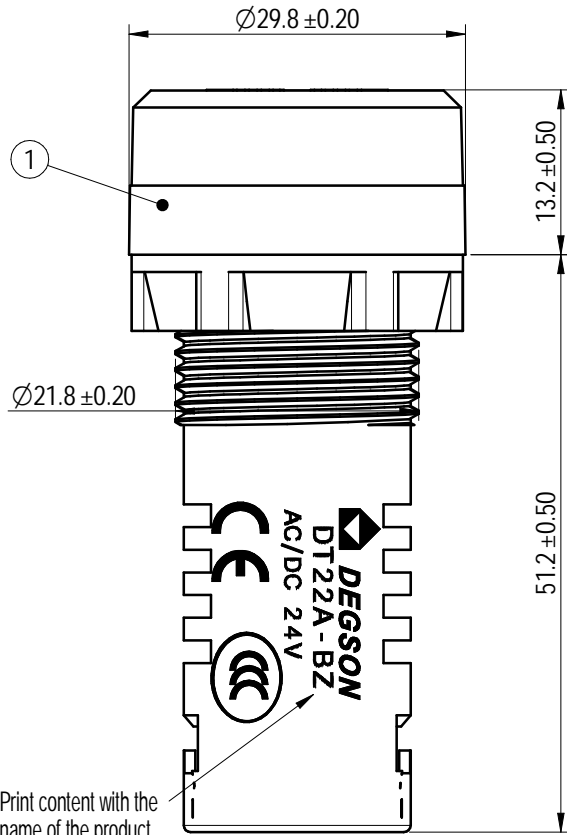


未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



Print content with the name of the product

DT22A - XBZ / Y AC/DCZV L

(Series No.)

(Product Type): BZ: Buzzer  
FBZ: Flash buzzer

(product standard):  
L: Long

(Voltage grade):  
AC/DC: 6/12/24/36/48/  
110/220V  
AC: 110/220/380V

(Color): RD: (Red)  
BL: (Black)

ITEM	NAME OF PART	MATERIAL	NOTES
1	Buzzer	/	/

海拔高度/Altitude height(m)	≤2000
使用环境温度/Environment temperature(°C)	-25~+55
储存环境温度/Storage temperature(°C)	-40~+70
空气相对湿度/Relative humidity	≤90%
污染等级/Pollution class	3
安装类别/Install type	III
防护等级/Front protect class	IP40
接线方式/Terminal type	带垫片螺钉接线
工作电流/Current(mA)	≤20
蜂鸣器分贝/The decibel of buzzer(dB)	80
LED灯寿命/Life of signal lamps(H)	≥50000
灯罩材质/lampshade material	PC
螺钉材质/Screw material	铁
外壳材质/body material	PA66
底盖材质/base material	ABS

DEGSON		MATERIAL:	SURFACE/COLOR:
APPD: 李根旁	2022.10.12	MAT NO./REV: / 00	MAT STATUS: 小批量
CHKD: 马恩开	2022.10.12	NAME DT22A-XBZ/YAC/DCZVL	
DRFT: 马恩开	2022.10.12	DRAWING NO. 200114817	TYPE CUSTOMER DRAWING
REV	ECN	DRAWING STATUS work	SCALE 1.5:1
DESCRIPTION		SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00		New Drawing	马恩开	2022.10.12

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in general. All rights reserved for patent. 除专利等明确标注外，本文件的所有权、复制、印刷、分发等文件的存储、使用等权利均保留。 未经授权，不得复制或传播本文件的内容。 所有权利保留。