

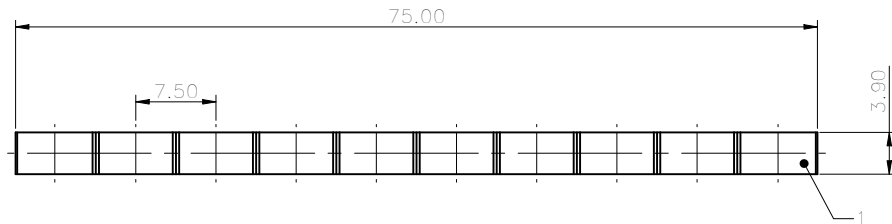


未注公差/General tolerances (mm)											D 0.1/10			
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400	>500
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

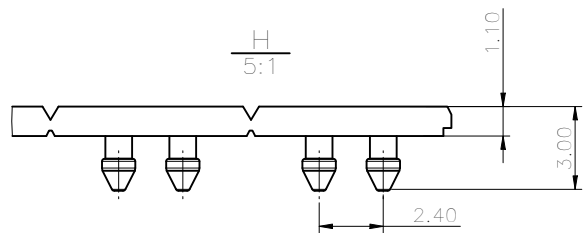

please refer to the 3D model, for those unmarked dimensions

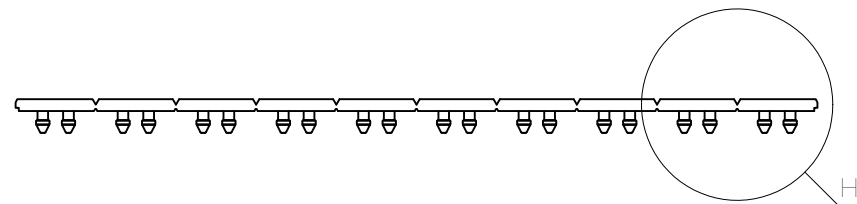

Note:The A&Z(H) in the name means: A(H) and Z(H).

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
	间距/Pitch(mm)/线数范围/Poles		7.50N=10P
	使用温度范围/Operating temperature(°C)		-40~+105
	符合RoHS 环保要求/Conform to RoHS		Yes

DIIGSON		MATERIAL:		SURFACE/COLOR:	
APPD: 蓝美凡	2022.12.15	NAME:		MAT STATUS: 批量	
CHKD: 曹利影	2022.12.15	TSZB4-10-1Y-00A&Z(H)			
DRFT: 孙科豪	2022.12.15	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200057736	CUSTOMER DRAWING	已发布	2:1
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET
00					1/1

Transfer or duplication of this document as well as the utilization or reproduction of its contents without the written permission of the copyright holder is prohibited. All rights reserved for patent.