


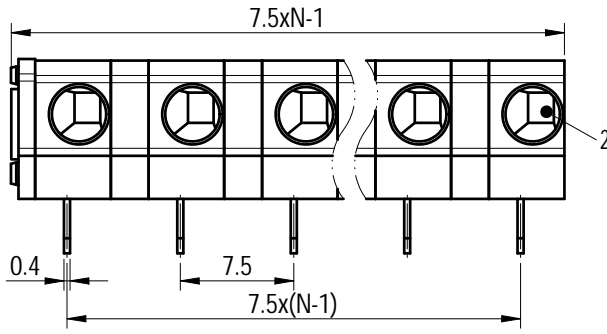

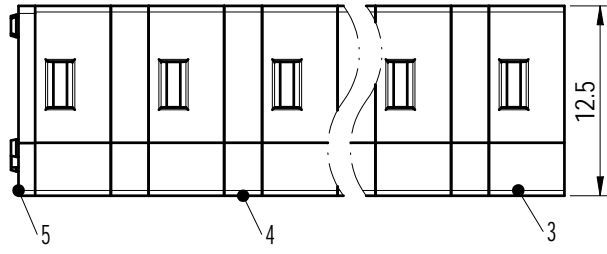


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by DESSON. All rights reserved for patent. 除专利申明授权外, 否则禁止转让、复制或传播。 未经书面许可, 不得复制或传播。 保留所有权利及专利权。 未经许可, 不得复制或传播。 保留所有权利及专利权。

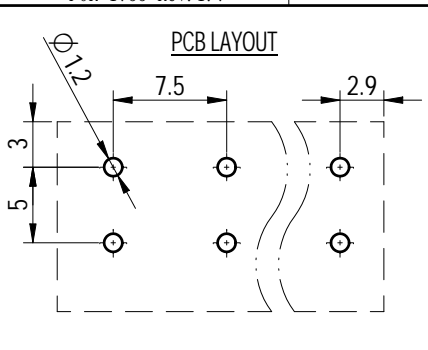

未注公差/General tolerances (mm)														0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

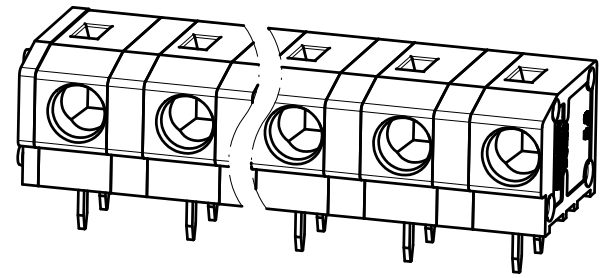

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
5	Cover	PA66	UL94V-0
4	Calpboard	PA66	UL94V-0
3	Housing	PA66	UL94V-0
2	Spring	Stainless steel	/
1	Pin header	Copper alloy	Sn plated

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/5	150/5	300/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	/	III/2	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/15	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	AC2500		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~18 / 0.2~1.5, 2.5(Sol)		
间距/Pitch(mm)/线数范围/Poles	7.5/N=02~16P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: -	SURFACE/COLOR:
MAT NO./REV: - / 00	MAT STATUS: 批量
APPD: 兰春华 2022.11.09	NAME
CHKD: 陈招 2022.11.09	DG235W-7.5-XXP-1Y-00A&Z(H)
DRFT: 袁路易 2022.11.09	DRAWING NO. 200022217
	TYPE CUSTOMER DRAWING
	DRAWING STATUS 已发布
	SCALE 2:1
	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			袁路易	2022.11.09