
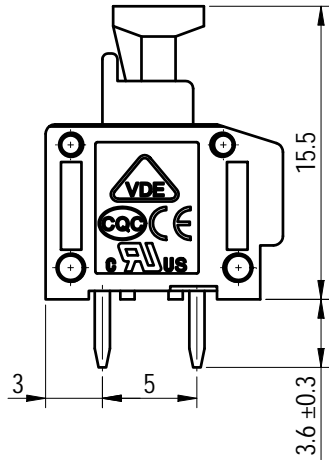


未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50	±2.50

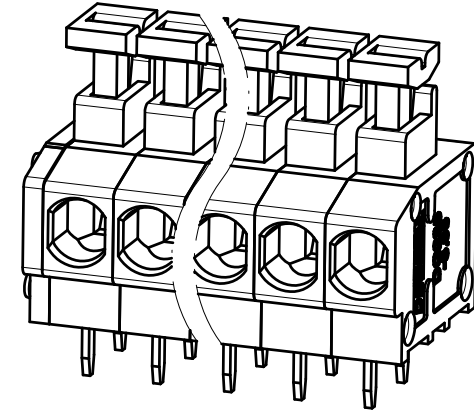

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
5	Cover	PA66	UL94V-0
4	Housing	PA66	UL94V-0
3	Spring	Stainless steel	/
2	Button	PA66	UL94V-0
1	Pin header	Copper alloy	Sn plated

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/5	150/5	300/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	/	III/2	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	250/10	/
工频耐压/Withstanding Voltage(V/1Min)	AC2000		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~18 / 0.5~1.5		
间距/Pitch(mm)/线数范围/Poles	3.96/N=02~24P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		




MATERIAL: -	SURFACE/COLOR:
MAT NO./REV: - / 00	MAT STATUS: 批量

APPD: 兰春华	2022.11.15
CHKD: 陈招	2022.11.15
DRFT: 袁路易	2022.11.15

NAME				
DRAWING NO. 200022215				
TYPE CUSTOMER DRAWING				
DRAWING STATUS 已发布				
SCALE 2.5:1				
SHEET 1/1				

REV	ECN	DESCRIPTION	DRFT	DATE
00			袁路易	2022.11.15



DRAWING NO. 200022215	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2.5:1	SHEET 1/1
-----------------------	-----------------------	--------------------	-------------	-----------

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密、技术秘密、其他合法权益外，本公司保留对涉及发明、实用新型、外观设计、集成电路布图设计专有权、商业秘密、技术秘密、其他合法权益的所有权利。