


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利等知识产权外，其他权利均归作者所有。未经许可，不得复制或传播。

未注公差/General tolerances (mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

Only 04~10 Poles there are these ribs on both sides

Only 04~10 Poles there are these ribs on both sides

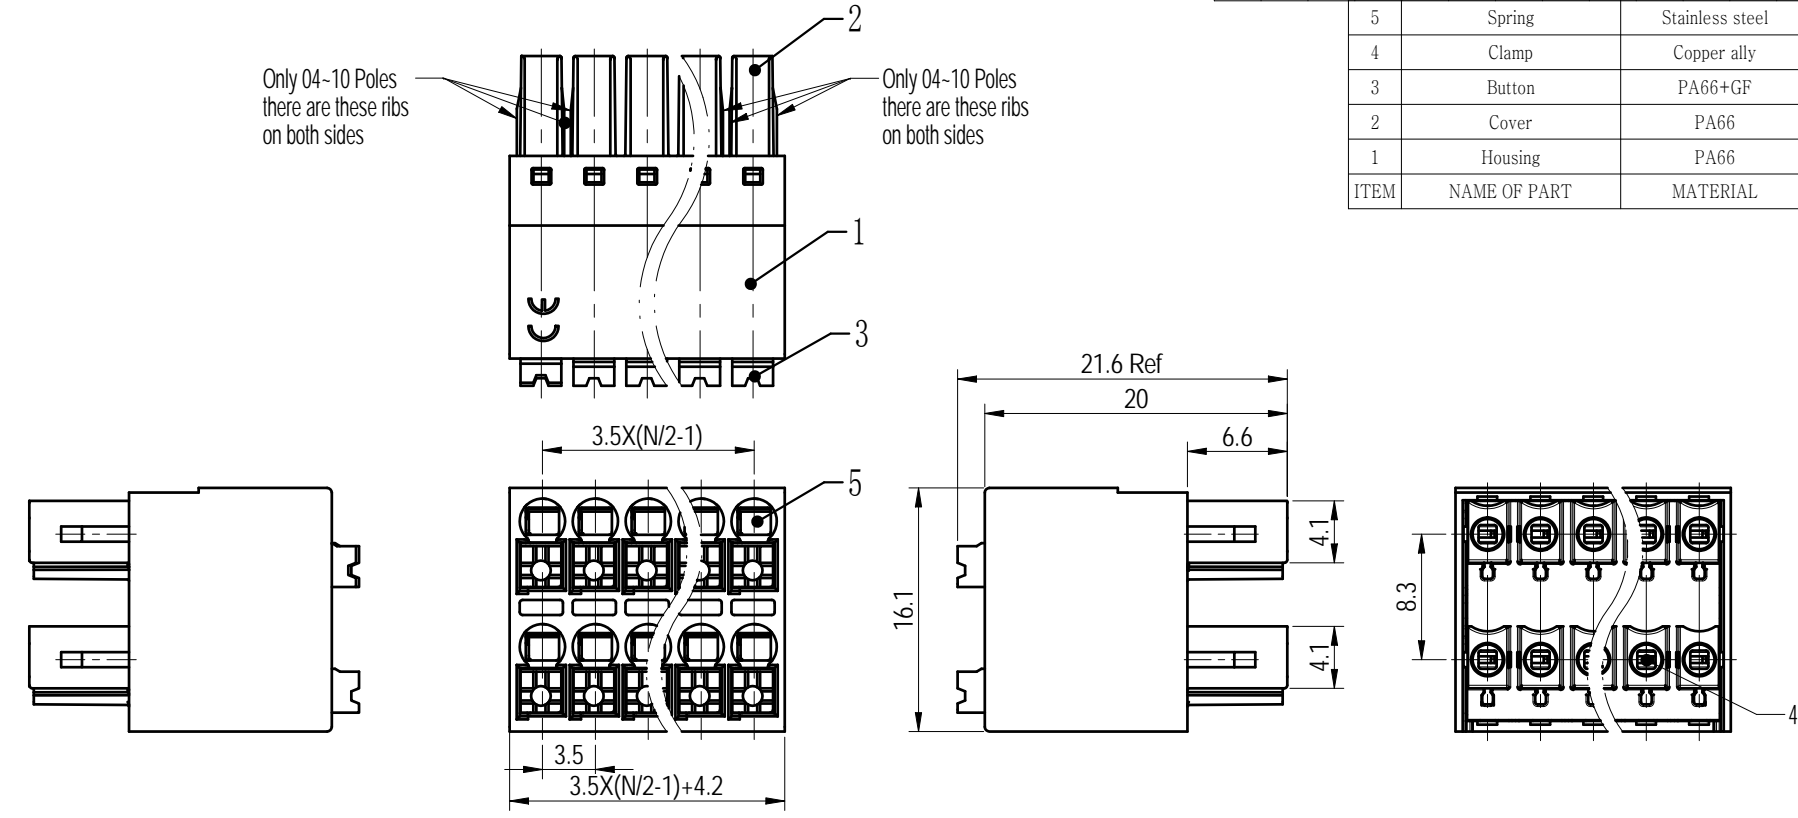

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	/
4	Clamp	Copper ally	Sn plated
3	Button	PA66+GF	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	160/8	160/8	320/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24~16 / 0.2~1.0&1.5(Sol)		
间距/Pitch(mm)/线数范围/Poles	3.5/N=04~48P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR:
		MAT NO./REV: - / 00	MAT STATUS: 批量
APPD: 兰春华	2024.04.26	NAME	
CHKD: 龚耀志	2024.04.26	15EDGKNHC-3.5-XXP-1Y-00Z (H)	
DRFT: 方哲盛	2024.04.26	DRAWING NO.	DRAWING STATUS
		200071327	已发布
		TYPE	SCALE
		CUSTOMER DRAWING	2:1
			SHEET
			1/1

REV	ECN	DESCRIPTION	DRFT	DATE
02		02P*10P盖板侧边加胶	方哲盛	2024.04.26