
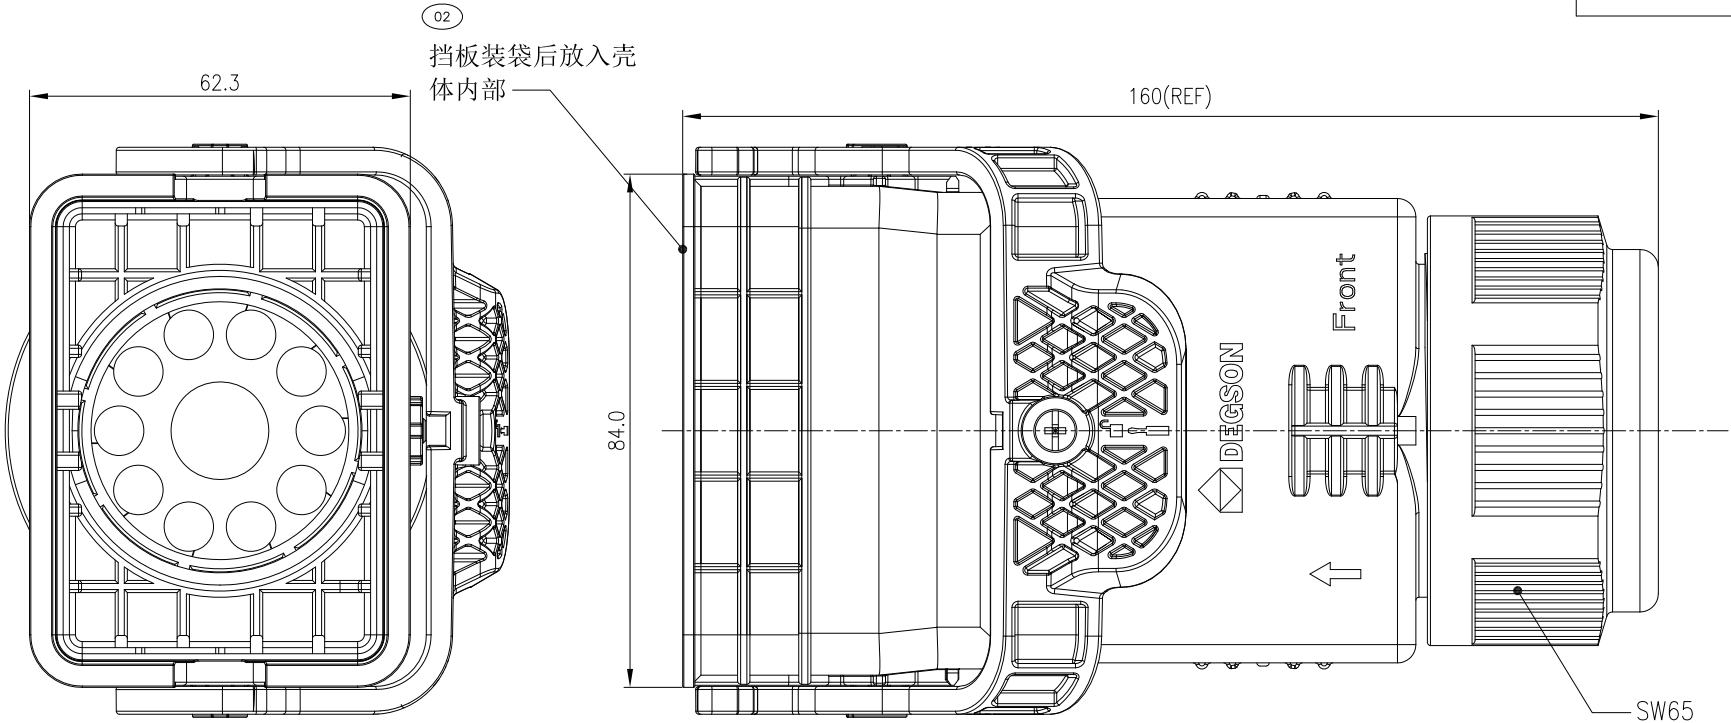


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交寄本文件的内容。未经许可擅自复制或传播，侵权者将承担法律责任。实用新型专利和发明专利的所有权利。

尺寸公差(mm)					电子线长度尺寸公差(mm)					0.05/10 ±T
0~30	>30~60	>60~100	>100~150	>150	0~50	50~150	150~300	300~1000	>1000	
±0.20	±0.30	±0.50	±0.70	±1.00	±5	±10	±15	±25	±35	

02 线缆OD/Cable OD	6.5~7.5mm
防水等级/Levels of protection	IP66
使用温度范围/Operating temperature(°C)	-40~+125°C
符合RoHS环保要求/Conform to RoHS	Yes



MATERIAL: /	SURFACE: /							
MAT.NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD							
STATUS: /								
APPD:	Description: PV-AC-M-CS-10P-65A-6-00Z(H)							
CHKD:	DRFT: YU JH 2024.06.05	DRAWING NO.: /						
REV	ECN	DESCRIPTION	DRFT	DATE	TYPE: PRODUCT DRAWING	SCALE: 1:1	REV	02
					SIZE: A4	mm (inch)	SHEET	1/1

02		更新载流体螺丝及适配线缆OD范围	YU JH	2024.10.08
01		更新载流体螺丝	YU JH	2024.10.08
REV	ECN	DESCRIPTION	DRFT	DATE