
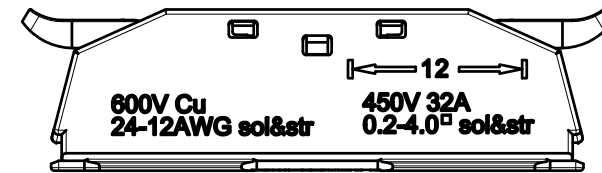

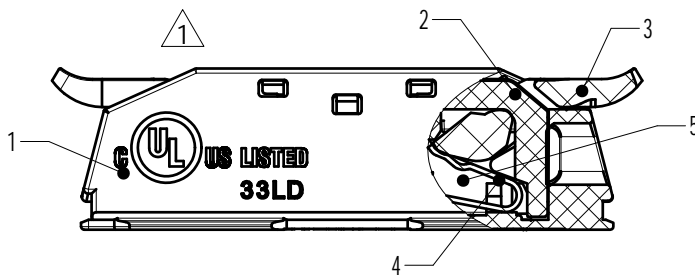



未注公差/General tolerances (mm)												0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

UL 标准/UL Standard:	
额定电压/电涌/Rated Voltage(V)/Current(A)	600
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2
额定电压/电涌/Rated Voltage(V)/Current(A)	450/32
工频耐压/Withstanding voltage(V/1Min)	AC2500
线数范围/Poles	N=01P
线径范围(硬线和软线)/Wire Range(rigid and	24~12 / 0.2~4.0
线数范围/Poles	N=01P
剥线长度/Stripping length(mm)	12~13
使用温度范围/Operating temperature(°C)	-40~+85(IEC)



Notes: The A&Z (H) in the name means:A(H) and Z(H)

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2



SCAL 1:1

品名/Name	按钮颜色/The button color	塑件&盖板颜色/The housing&cover color	包装方式/Manner of packing
DGBSC-SG02/4-01P (1Y-00A&ZH)	绿色/Green	透明/Transparent	普通盒装/Normal box
DGBSC-SG02/4-01P (1Y-01A&ZH)	白色/White	透明/Transparent	普通盒装/Normal box
DGBSC-SG02/4-01P (1Y-02A&ZH)	黄绿色/Yellow&Green	透明/Transparent	普通盒装/Normal box
DGBSC-SG02/4-01P (1Y-03A&ZH)	蓝色/Blue(Pantone 5473 C)	透明/Transparent	普通盒装/Normal box
DGBSC-SG02/4-01P (1Y-10A&ZH)	绿色/Green	透明/Transparent	彩盒装/Color box
DGBSC-SG02/4-01P (1Y-16A&ZH)	绿色/Green	透明/Transparent	飞机卡装/Paper card packing
DGBSC-SG02/4-01P (1Y-18A&ZH)	白色/White	透明/Transparent	飞机卡装/Paper card packing

MATERIAL: /	SURFACE/COLOR: /
MAT NO./REV: - / 00	MAT STATUS: 小批量

APPD: 蓝贵凡 2023.06.10	NAME	DGBSC-SG02/4-01P (1Y-00ZH)
CHKD: 曹利彬 2023.06.10		

01	增加U1刻字	曹利彬	2024.03.19	DRFT: 曹利彬 2023.06.10	DRAWING NO. 200199127	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1	SHEET 1/1
REV	ECN	DESCRIPTION	DRFT	DATE					

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless approved in advance. All rights reserved for patent. 未经授权复制或传播本文件内容，或在本文件内容基础上进行任何修改、复制或传播，均属于侵权行为。保留所有权利，未经许可，不得复制或传播本文件内容。